

PROSHARP 宝鲨

PROSHARP TOOL: Portable, Fast, Safe, Reliable



- Portable Rebar Cutter
- Portable Rebar Bender
- Rebar Straightening Machine
- Hydraulic Punching Machine
- Cold Cut Saw



The company has passed
ISO9001:2000

PROSHARP 宝世

Portable Rebar Cutter

HIGHER POWER

1000-1700W carbon brush motor

LIGHTNING QUICK

As fast as 1 second

PORTABLE & LIGHTWEIGHT

9.5kg minimum, with Toolbox

HIGH EFFICIENCY

Improved by 30%



RC-16A Rebar Cutter (4-16mm)

Portable rebar cutter



■ Product Features

- High-power 1000W carbon brush motor
- Lightning quick cut - under 1.5 seconds
- Industrial strength machine head
- Lightweight, portable, low noise
- Cutting efficiency up 30%
- Bigger oil storage of cylinder



PROSHARP		PRODUCT INFO	
Model	RC-16A	Cutting speed	1-1.5 S
Type	Rebar Cutter	Maximum. Rebar	16 mm/0.63 inch
Color	Red, Blue	Minimal. Rebar	4 mm/0.157 inch
Rebar cutting method	Cold extrusion	Handle length	Pull back 14CM
Voltage	220V/110V, custom accept	Rebar material type	Low carbon steel, round steel, thread steel
No-load power	1000W		
PRODUCT SIZE		PACKAGE SIZE	
Length(mm)	500	Length	570
Width(mm)	110	Width	140
Height(mm)	140	Height(mm)	250
Weight(kg)	9.5	Weight(kg)	12

Toolbox includes: Hydraulic oil pot, tool kit, operation manual, inner PE, outer 7 layers of corrugated paper

RC-16B Rebar Cutter (4-16mm)

Portable rebar cutter



■ Product Features

- High-power 1000W carbon brush motor
- Lightning quick cut - under 1.5 seconds
- Industrial strength machine head
- Lightweight, portable, low noise
- Cutting efficiency up 30%
- Bigger oil storage of cylinder



PROSHARP	PRODUCT INFO		
Model	RC-16B	Cutting speed	1-1.5 S
Type	Rebar Cutter	Maximum. Rebar	16 mm/0.63 inch
Color	Red, Blue	Minimal. Rebar	4 mm/0.157 inch
Rebar cutting method	Cold extrusion	Handle length	Pull up 18.5 CM
Voltage	220V/110V, custom accept	Rebar material type	Low carbon steel, round steel, thread steel
No-load power	1000W		
PRODUCT SIZE		PACKAGE SIZE	
Length(mm)	410	Length	480
Width(mm)	110	Width	150
Height(mm)	190	Height(mm)	310
Weight(kg)	9.5	Weight(kg)	12

Toolbox includes: Hydraulic oil pot, tool kit, operation manual, inner PE, outer 7 layers of corrugated paper

RC-20A Rebar Cutter (4-20mm)

Portable rebar cutter



■ Product Features

- High-power 1050W carbon brush motor
- Lightning quick cut - under 2 seconds
- Industrial strength machine head
- Lightweight, portable, low noise
- Cutting efficiency up 30%
- Bigger oil storage of cylinder



PROSHARP		PRODUCT INFO	
Model	RC-20A	Cutting speed	1.5-2 S
Type	Rebar Cutter	Maximum. Rebar	20 mm/0.788 inch
Color	Red, Blue	Minimal. Rebar	4 mm/0.157 inch
Rebar cutting method	Cold extrusion	Handle length	Pull back 14 CM
Voltage	220V/110V, custom accept	Rebar material type	Low carbon steel, round steel, thread steel
No-load power	1050W		
PRODUCT SIZE		PACKAGE SIZE	
Length(mm)	530	Length	570
Width(mm)	110	Width	140
Height(mm)	140	Height(mm)	250
Weight(kg)	11.5	Weight(kg)	14

Toolbox includes: Hydraulic oil pot, tool kit, operation manual, inner PE, outer 7 layers of corrugated paper

RC-20B Rebar Cutter (4-20mm)

Portable rebar cutter



■ Product Features

- High-power 1050W carbon brush motor
- Lightning quick cut - under 2 seconds
- Industrial strength machine head
- Lightweight, portable, low noise
- Cutting efficiency up 30%
- Bigger oil storage of cylinder



PROSHARP		PRODUCT INFO	
Model	RC-20B	Cutting speed	1.5-2 S
Type	Rebar Cutter	Maximum. Rebar	20 mm/0.788 inch
Color	Red,blue	Minimal. Rebar	4 mm/0.157 inch
Rebar cutting method	Cold extrusion	Handle length	Pull up 18.5 CM
Voltage	220V/110V, custom accept	Rebar material type	Low carbon steel, round steel, thread steel
No-load power	1050W		
PRODUCT SIZE		PACKAGE SIZE	
Length(mm)	430	Length	480
Width(mm)	110	Width	150
Height(mm)	220	Height(mm)	310
Weight(kg)	11.5	Weight(kg)	14

Toolbox includes: Hydraulic oil pot, tool kit, operation manual, inner PE, outer 7 layers of corrugated paper

RC-22 Rebar Cutter (4-22mm)

Portable rebar cutter



■ Product Features

- High-power 1150W carbon brush motor
- Lightning quick cut - under 2.5 seconds
- Industrial strength machine head
- Lightweight, portable, low noise
- Cutting efficiency up 30%
- Bigger oil storage of cylinder



PROSHARP		PRODUCT INFO	
Model	RC-22	Cutting speed	2-2.5 S
Type	Rebar Cutter	Maximum. Rebar	22 mm/0.867 inch
Color	Red, Blue	Minimal. Rebar	4 mm/0.157 inch
Rebar cutting method	Cold extrusion	Handle length	Pull up 19 CM
Voltage	220V/110V, custom accept	Rebar material type	Low carbon steel, round steel, thread steel
No-load power	1150W		
PRODUCT SIZE		PACKAGE SIZE	
Length(mm)	450	Length	500
Width(mm)	110	Width	150
Height(mm)	220	Height(mm)	310
Weight(kg)	13.5	Weight(kg)	16

Toolbox includes: Hydraulic oil pot, tool kit, operation manual, inner PE, outer 7 layers of corrugated paper

RC-25 Rebar Cutter (4-25mm)

Portable rebar cutter



■ Product Features

- High-power 1600W carbon brush motor
- Lightning quick cut - under 3 seconds
- Industrial strength machine head
- Lightweight, portable, low noise
- Cutting efficiency up 30%
- Bigger oil storage of cylinder



PROSHARP		PRODUCT INFO	
Model	RC-25	Cutting speed	2.5-3 S
Type	Rebar Cutter	Maximum. Rebar	25 mm/0.985 inch
Color	Red, Blue	Minimal. Rebar	4 mm/0.157 inch
Rebar cutting method	Cold extrusion	Handle length	Pull up 19 CM
Voltage	220V/110V, custom accept	Rebar material type	Low carbon steel, round steel, thread steel
No-load power	1600W		
PRODUCT SIZE		PACKAGE SIZE	
Length(mm)	540	Length	580
Width(mm)	150	Width	180
Height(mm)	230	Height(mm)	330
Weight(kg)	22	Weight(kg)	27

Toolbox includes: Hydraulic oil pot, tool kit, operation manual, inner PE, outer 7 layers of corrugated paper

RC-32 Rebar Cutter (4-32mm)

Portable rebar cutter



■ Product Features

- High-power 1700W carbon brush motor
- Lightning quick cut - under 5 seconds
- Industrial strength machine head
- Lightweight, portable, low noise
- Cutting efficiency up 30%
- Bigger oil storage of cylinder

PROSHARP		PRODUCT INFO	
Model	RC-32	Cutting speed	4-5 S
Type	Rebar Cutter	Maximum. Rebar	32 mm/1.26 inch
Color	Red, Blue	Minimal. Rebar	4 mm/0.157 inch
Rebar cutting method	Cold extrusion	Handle length	Pull up 20 CM
Voltage	220V/110V, custom accept	Rebar material type	Low carbon steel, round steel, thread steel
No-load power	1700W		
PRODUCT SIZE		PACKAGE SIZE	
Length(mm)	605	Length	790
Width(mm)	170	Width	240
Height(mm)	275	Height(mm)	320
Weight(kg)	30	Weight(kg)	35

Toolbox includes: Hydraulic oil pot, tool kit, operation manual, inner PE, outer 7 layers of corrugated paper

PROSHARP 宝馨



Scissor Type Rebar Cutter

Its head can insert into the steel cage

- For construction sites, power engineering & fire fighting
- Lightweight, small size, fast speed
- High power motor, high efficiency
- No sparks, no dust, safe & reliable

SC-16A Scissors Type Rebar Cutter (4-16mm)



■ Product Features

- Scissor type, the head can extend to the steel cage
- High-power 1000W carbon brush motor
- Lightning quick cut - under 2 seconds
- Lightweight, small size, low noise
- No sparks, no dust, safe & reliable

PROSHARP		PRODUCT INFO	
Model	SC-16A	Cutting speed	1.5-2 S
Type	Rebar Cutter	Maximum. Rebar	16 mm/0.63 inch
Color	Red, Blue	Minimal. Rebar	4 mm/0.157 inch
Rebar cutting method	Open jaw scissors	Handle length	Pull back 14 CM
Voltage	220V/110V	Rebar material type	Low carbon steel, round steel, thread steel
No-load power	1000W		
PRODUCT SIZE		PACKAGE SIZE	
Length(mm)	520	Length	570
Width(mm)	105	Width	140
Height(mm)	140	Height(mm)	250
Weight(kg)	10	Weight(kg)	12.5

Toolbox includes: Hydraulic oil pot, tool kit, operation manual, inner PE, outer 7 layers of corrugated paper

SC-16B Scissors Type Rebar Cutter (4-16mm)



■ Product Features

- Scissor type, the head can extend to the steel cage
- High-power 1000W carbon brush motor
- Lightning quick cut - under 2 seconds
- Lightweight, small size, low noise
- No sparks, no dust, safe & reliable

PROSHARP		PRODUCT INFO	
Model	SC-16B	Cutting speed	1.5-2 S
Type	Rebar Cutter	Maximum. Rebar	16 mm/0.63 inch
Color	Red, Blue	Minimal. Rebar	4 mm/0.157 inch
Rebar cutting method	Open jaw scissors	Handle length	Pull up 19 CM
Voltage	220V/110V	Rebar material type	Low carbon steel, round steel, thread steel
No-load power	1000W		
PRODUCT SIZE		PACKAGE SIZE	
Length(mm)	440	Length	480
Width(mm)	105	Width	150
Height(mm)	310	Height(mm)	310
Weight(kg)	10	Weight(kg)	12.5

Toolbox includes: Hydraulic oil pot, tool kit, operation manual, inner PE, outer 7 layers of corrugated paper

PROSHARP 宝星



Cordless Rebar Cutter

Electric, Battery Powered

- For construction sites, power engineering & fire fighting
- Lightweight, small size
- Special for high-altitude operations
- No sparks, no dust, safe & reliable

BC-16 Battery Powered Rebar Cutter (4-16mm)

Cordless rebar cutter



■ Product Features

- Cordless, special for high-altitude operations
- High-power 400W brushless motor
- Lightning quick cut - under 4 seconds
- Cutting efficiency up 30%
- Lightweight, small size, low noise
- No sparks, no dust, safe & reliable



PROSHARP		PRODUCT INFO	
Model	BC-16	Cutting speed	3.5-4S
Voltage	18V 5Ah	Cut-off range	4-16 mm
Color	Silver gray	Battery charging time	90 min
Rebar cutting method	Cold extrusion	Battery charger input	AC110-240V 50-60Hz
Type	Cordless Electric Rebar Cutter	Work efficiency after single charge	Cut times of 110-120
Power	400W	Battery capacity	5000mA
PRODUCT SIZE		PACKAGE SIZE	
Length(mm)	270	Length	500
Width(mm)	370	Width	155
Height(mm)	110	Height(mm)	430
Weight(kg)	7	Weight(kg)	13.5

Toolbox includes: Hydraulic oil pot, tool kit, operation manual, inner PE, outer 7 layers of corrugated paper

BC-20 Battery Powered Rebar Cutter (4-20mm)

Cordless rebar cutter



■ Product Features

- Cordless, special for high-altitude operations
- High-power 400W brushless motor
- Lightning quick cut - under 4 seconds
- Cutting efficiency up 30%
- Lightweight, small size, low noise
- No sparks, no dust, safe & reliable



PROSHARP		PRODUCT INFO	
Model	BC-20	Cutting speed	3.5-4S
Voltage	18V 5Ah	Cut-off range	4-20 mm
Color	Silver gray	Battery charging time	90 min
Rebar cutting method	Cold extrusion	Battery charger input	AC110-240V 50-60Hz
Type	Cordless Electric Rebar Cutter	Work efficiency after single charge	Cut times of 110-120
Power	400W	Battery capacity	5000mA
PRODUCT SIZE		PACKAGE SIZE	
Length(mm)	270	Length	500
Width(mm)	370	Width	155
Height(mm)	110	Height(mm)	430
Weight(kg)	8	Weight(kg)	14.5

Toolbox includes: Hydraulic oil pot, tool kit, operation manual, inner PE, outer 7 layers of corrugated paper

SC-16C Scissor Type Battery Powered Rebar Cutter (4-16mm)

Cordless rebar cutter



■ **Product Features**

- Cordless, special for high-altitude operations
- Scissor type, the head can extend to the steel cage
- High-power 400W brushless motor
- Lightning quick cut - under 4 seconds
- Lightweight, small size, low noise
- No sparks, no dust, safe & reliable

PROSHARP		PRODUCT INFO	
Model	SC-16C	Cutting speed	3.5-4S
Voltage	18V 5Ah	Cut-off range	4-16 mm
Color	Silver gray	Battery charging time	90 min
Rebar cutting method	Open jaw scissors	Battery charger input	AC110-240V 50-60Hz
Type	Cordless Electric Rebar Cutter	Work efficiency after single charge	Cut times of 110-120
Power	400W	Battery capacity	5000mA
PRODUCT SIZE		PACKAGE SIZE	
Length(mm)	270	Length	500
Width(mm)	430	Width	155
Height(mm)	110	Height(mm)	430
Weight(kg)	9.5	Weight(kg)	16.5

Toolbox includes: Hydraulic oil pot, tool kit, operation manual, inner PE, outer 7 layers of corrugated paper

PROSHARP 宝尚

Portable Rebar Bender

HIGHER POWER

1100-1600W carbon brush motor

LIGHTNING QUICK

As fast as 2 second

PORTABLE & LIGHTWEIGHT

13.8kg minimum, with Toolbox

HIGH EFFICIENCY

Improved by 30%



HRB-16A Rebar Bender (10-16mm)

Portable rebar bender



■ Product Features

- High-power 1100W carbon brush motor
- Lightning quick bending - under 2.5 seconds
- Industrial strength machine head
- Lightweight, portable, low consumption
- Bending efficiency up 30%
- Bigger oil storage of cylinder



PROSHARP		PRODUCT INFO	
Model	HRB-16A	Bending speed	2-2.5 S
Type	Rebar Bender	Maximum. Rebar	16 mm/0.63 inch
Color	Red, Blue	Minimal. Rebar	10 mm/0.394 inch
Power	1100W	Handle length	Pull back 14 CM
Voltage	220V/110V, custom accept	Rebar material type	Low carbon steel, round steel, thread steel

PRODUCT SIZE		PACKAGE SIZE	
Length(mm)	630	Length	670
Width(mm)	150	Width	200
Height(mm)	155	Height(mm)	255
Weight(kg)	13.8	Weight(kg)	17.5

Toolbox includes: Hydraulic oil can, tool kit, operation manual, inner PE, outer 7-layer corrugated paper

HRB-16B Rebar Bender (10-16mm)

Portable rebar bender



■ Product Features

- High-power 1100W carbon brush motor
- Lightning quick bending - under 2.5 seconds
- Industrial strength machine head
- Lightweight, portable, low consumption
- Bending efficiency up 30%
- Bigger oil storage of cylinder



PROSHARP		PRODUCT INFO	
Model	HRB-16B	Bending speed	2-2.5 S
Type	Rebar Bender	Maximum. Rebar	16 mm/0.63 inch
Color	Red, Blue	Minimal. Rebar	10 mm/0.394 inch
Power	1100W	Handle length	Pull up 19 CM
Voltage	220V/110V, custom accept	Rebar material type	Low carbon steel, round steel, thread steel

PRODUCT SIZE		PACKAGE SIZE	
Length(mm)	545	Length	600
Width(mm)	200	Width	210
Height(mm)	150	Height(mm)	290
Weight(kg)	13.8	Weight(kg)	19

Toolbox includes: Hydraulic oil can, tool kit, operation manual, inner PE, outer 7-layer corrugated paper

HRB-22 Rebar Bender (16-22mm)

Portable rebar bender



■ Product Features

- High-power 1150W carbon brush motor
- Lightning quick bending - under 3 seconds
- Industrial strength machine head
- Lightweight, portable, low consumption
- Bending efficiency up 30%
- Bigger oil storage of cylinder



PROSHARP		PRODUCT INFO	
Model	HRB-22	Bending speed	2.5-3 S
Type	Rebar Bender	Maximum. Rebar	22 mm/0.867 inch
Color	Red, Blue	Minimal. Rebar	16 mm/0.63 inch
Power	1150W	Handle length	Pull back 14 CM
Voltage	220V/110V, custom accept	Rebar material type	Low carbon steel, round steel, thread steel

PRODUCT SIZE		PACKAGE SIZE	
Length(mm)	640	Length	670
Width(mm)	185	Width	200
Height(mm)	175	Height(mm)	255
Weight(kg)	14.8	Weight(kg)	19.5

Toolbox includes: Hydraulic oil can, tool kit, operation manual, inner PE, outer 7-layer corrugated paper

HRB-25 Rebar Bender (16-25mm)

Portable rebar bender



■ Product Features

- High-power 1200W carbon brush motor
- Lightning quick bending - under 5 seconds
- Industrial strength machine head
- Lightweight, portable, low consumption
- Bending efficiency up 30%
- Bigger oil storage of cylinder



PROSHARP		PRODUCT INFO	
Model	HRB-25	Bending speed	4-5 S
Type	Rebar Bender	Maximum. Rebar	25mm/0.985 inch
Color	Red, Blue	Minimal. Rebar	16 mm/0.63 inch
Power	1200W	Handle length	Pull back 19 CM
Voltage	220V/110V, custom accept	Rebar material type	Low carbon steel, round steel, thread steel

PRODUCT SIZE		PACKAGE SIZE	
Length(mm)	675	Length	720
Width(mm)	185	Width	220
Height(mm)	190	Height(mm)	240
Weight(kg)	18	Weight(kg)	24

Toolbox includes: Hydraulic oil can, tool kit, operation manual, inner PE, outer 7-layer corrugated paper

HRB-28 Rebar Bender (20-28mm)

Portable rebar bender



■ Product Features

- High-power 1250W carbon brush motor
- Lightning quick bending - under 5 seconds
- Industrial strength machine head
- Lightweight, portable, low consumption
- Bending efficiency up 30%
- Bigger oil storage of cylinder

PROSHARP		PRODUCT INFO	
Model	HRB-28	Bending speed	4-5 S
Type	Rebar Bender	Maximum. Rebar	28mm/1.103 inch
Color	Red, Blue	Minimal. Rebar	20mm/0.787 inch
Power	1250W	Handle length	Pull back 21 CM
Voltage	220V/110V, custom accept	Rebar material type	Low carbon steel, round steel, thread steel

PRODUCT SIZE		PACKAGE SIZE	
Length(mm)	720	Length	800
Width(mm)	180	Width	300
Height(mm)	195	Height(mm)	215
Weight(kg)	22	Weight(kg)	32

Toolbox includes: Hydraulic oil can, tool kit, operation manual, inner PE, outer 7-layer corrugated paper

HRB-32 Rebar Bender (22-32mm)

Portable rebar bender



■ **Product Features**

- High-power 1600W carbon brush motor
- Lightning quick bending - under 6 seconds
- Industrial strength machine head
- Lightweight, portable, low consumption
- Bending efficiency up 30%
- Bigger oil storage of cylinder

PROSHARP		PRODUCT INFO	
Model	HRB-32	Bending speed	5-6S
Type	Rebar Bender	Maximum. Rebar	32 mm/1.26 inch
Color	Red, Blue	Minimal. Rebar	22 mm/0.866 inch
Power	1600W	Handle length	Pull up 20 CM
Voltage	220V/110V, custom accept	Rebar material type	Low carbon steel, round steel, thread steel

PRODUCT SIZE		PACKAGE SIZE	
Length(mm)	640	Length	800
Width(mm)	190	Width	215
Height(mm)	230	Height(mm)	300
Weight(kg)	23	Weight(kg)	33

Toolbox includes: Hydraulic oil can, tool kit, operation manual, inner PE, outer 7-layer corrugated paper



Cordless Rebar Bender

Electric, Battery Powered

- For construction sites, power engineering & fire fighting
- Lightweight, small size
- Special for high-altitude operations
- No sparks, no dust, safe & reliable

BRB-16 Electric Rebar Bender (10-16mm)

Cordless rebar bender



■ **Product Features**

- Cordless, special for high-altitude operations
- High-power 400W brushless motor
- Lightning quick bend - under 4.5 seconds
- Bending efficiency up 30%
- Lightweight, portable, low consumption

PROSHARP		PRODUCT INFO	
Model	BRB-16	Bending speed	4-4.5 S
Type	Rebar Bender	Bending range	10-16mm
Color	Silver gray	Battery capacity	5000mA
Power	400W	Battery charging time	90 min
Voltage	18V 5Ah	Battery charger input	AC110-240V 50-60Hz

PRODUCT SIZE		PACKAGE SIZE	
Length(mm)	300	Length	400
Width(mm)	535	Width	560
Height(mm)	130	Height(mm)	155
Weight(kg)	14	Weight(kg)	20

Toolbox includes: Hydraulic oil can, tool kit, operation manual, inner PE, outer 7-layer corrugated paper



Rebar Bender Machine

- Superior quality & performance
- Robust, wear-resistant, reliable
- Accurate angle setting
- Lightning quick bending - under 4 seconds

RB-16 Bar Bender Machine

Rebar Bender Machine



■ Product Features

- 850/900W no-Load power
- 0-180° bending angle
- Foot switch easy operating
- Multi-angle forming, high efficiency
- Lightning quick bending - under 4 seconds

PROSHARP		PRODUCT INFO	
Model	RB-16	Certificate	CE ROHS ECM
Voltage	220V/110V	Net weight	25kg
No-load power	850W/900W	Gross weight	35kg
Bending angle	0-180°	Dimensions	400×370×230mm
Bending range	6-16mm	Package dimensions	600×400×300mm
Bending speed	3.5-4s	Package	Outer tin box packaging

RB-25A Bar Bender Machine

Rebar Bender Machine



■ Product Features

- 1600W no-Load power
- 0-180° bending single angle
- Foot switch easy operating
- Multi-angle forming, high efficiency
- Lightning quick bending - under 4 seconds

PROSHARP	PRODUCT INFO		
Model	RB-25A	Certificate	CE ROHS ECM
Voltage	220V/110V	Net weight	78kg
No-load power	1600W	Gross weight	96kg
Bending angle	0-180°(Single angle)	Dimensions	440×430×430mm
Bending range	6-25mm	Package dimensions	500×555×505mm
Bending speed	3.5-4s	Package	Outer tin box packaging

RB-25B Bar Bender Machine

Rebar Bender Machine



■ Product Features

- 1600/1700W no-Load power
- 0-180° bending double angle
- Foot switch easy operating
- Multi-angle forming, high efficiency
- Lightning quick bending - under 4 seconds

PROSHARP		PRODUCT INFO	
Model	RB-25B	Certificate	CE ROHS ECM
Voltage	220V/110V	Net weight	79kg
No-load power	1600W/1700W	Gross weight	97kg
Bending angle	0-180°(Double angle)	Dimensions	440×430×430mm
Bending range	6-25mm	Package dimensions	500×555×505mm
Bending speed	3.5-4s	Package	Outer tin box packaging

PROSHARP 宝盛

Rebar Straightening Machine

HIGHER POWER

1200-1600W carbon brush motor

LIGHTNING QUICK

As fast as 4 second

PORTABLE & LIGHTWEIGHT

18kg minimum, with Toolbox

HIGH EFFICIENCY

Improved by 30%



HRS-25 Rebar Straightening Machine (16-25mm)

Rebar straightening machine



■ Product Features

- High-power 1200W carbon brush motor
- Lightning quick straightening - under 5 seconds
- Industrial strength machine head
- Lightweight, portable, low noise
- Straightening efficiency up 30%
- Bigger oil storage of cylinder

PROSHARP		PRODUCT INFO	
Model	HRS-25	Cutting speed	4-5S
Type	Rebar Straightening Machine	Maximum. Rebar	25 mm/0.985 inch
Color	Red, Blue	Minimal. Rebar	16 mm/0.63 inch
Power	1200W	Handle length	Pull back 14 CM
Voltage	220V/110V	Rebar material type	Medium carbon steel, low carbon steel, round steel, thread steel
PRODUCT SIZE		PACKAGE SIZE	
Length(mm)	675	Length	720
Width(mm)	185	Width	220
Height(mm)	190	Height(mm)	240
Weight(kg)	18	Weight(kg)	24

Toolbox includes: Hydraulic oil can, tool kit, operation manual, inner PE, outer 7-layer corrugated paper

HRS-28 Rebar Straightening Machine (20-28mm)

Rebar straightening machine



■ Product Features

- High-power 1250W carbon brush motor
- Lightning quick straightening - under 5 seconds
- Industrial strength machine head
- Lightweight, portable, low noise
- Straightening efficiency up 30%
- Bigger oil storage of cylinder

PROSHARP		PRODUCT INFO	
Model	HRS-28	Cutting speed	4-5S
Type	Rebar Straightening Machine	Maximum. Rebar	28 mm/1.103 inch
Color	Red, Blue	Minimal. Rebar	20 mm/ 0.787 inch
Power	1250W	Handle length	Pull back 19 CM
Voltage	220V/110V	Rebar material type	Medium carbon steel, low carbon steel, round steel, thread steel
PRODUCT SIZE		PACKAGE SIZE	
Length(mm)	720	Length	800
Width(mm)	180	Width	300
Height(mm)	195	Height(mm)	215
Weight(kg)	22	Weight(kg)	32

Toolbox includes: Hydraulic oil can, tool kit, operation manual, inner PE, outer 7-layer corrugated paper

HRS-32 Rebar Straightening Machine (22-32mm)

Rebar straightening machine



■ Product Features

- High-power 1600W carbon brush motor
- Lightning quick straightening - under 6 seconds
- Industrial strength machine head
- Lightweight, portable, low noise
- Straightening efficiency up 30%
- Bigger oil storage of cylinder

PROSHARP		PRODUCT INFO	
Model	HRS-32	Cutting speed	5-6S
Type	Rebar Straightening Machine	Maximum. Rebar	32 mm/1.26 inch
Color	Red, Blue	Minimal. Rebar	22 mm/0.866 inch
Power	1600W	Handle length	Pull up 20 CM
Voltage	220V/110V	Rebar material type	Medium carbon steel, low carbon steel, round steel, thread steel
PRODUCT SIZE		PACKAGE SIZE	
Length(mm)	400	Length	800
Width(mm)	190	Width	215
Height(mm)	230	Height(mm)	300
Weight(kg)	23	Weight(kg)	33

Toolbox includes: Hydraulic oil can, tool kit, operation manual, inner PE, outer 7-layer corrugated paper

Hydraulic Punching Machine

- ✓ PUNCHING RANGE OF 6-20MM
- ✓ STRONG POWER MOTOR, LOW NOISE
- ✓ IMPORTED KNIFE SHAFT SEALING RING
- ✓ PUNCHING EFFICIENCY UP 30%
- ✓ INCREASES OIL STORAGE OF CYLINDER
- ✓ QUICK PUNCHING & LIGHT WEIGHT



PM-20A Hydraulic Punching Machine

Hydraulic punching machine



■ Product Features

For 0-6mm thick steel, iron, copper, aluminum...
 Punching holes of 6-20mm
 High-power 1000W carbon brush motor
 Lightning quick punching - under 3 seconds
 Lightweight off 30%, small size

PROSHARP		PRODUCT INFO	
Model	PM-20A	Punching speed	2-3S
Type	Hydraulic Punching Machine	Punching range	6-20mm
Color	Red	Punching thickness	0-6mm
Power	1000W	Handle length	Pull back 14 CM
Voltage	220V/110V	Material type	Steel plate, iron plate, copper plate, aluminum plate, etc.
PRODUCT SIZE		PACKAGE SIZE	
Length(mm)	515	Length	570
Width(mm)	110	Width	140
Height(mm)	175	Height(mm)	310
Weight(kg)	13	Weight(kg)	19

Toolbox includes: Hydraulic oil can, tool kit, operation manual, inner PE, outer 7-layer corrugated paper

BPM-20 Lithium Battery Electric Hydraulic Punching Machine

Hydraulic punching machine



■ Product Features

- Lithium battery powered, 450W brushless motor
- For 0-6mm thick steel, iron, copper, aluminum...
- Punching holes of 6-20mm
- Lightning quick punching - under 3 seconds
- Lightweight off 30%, small size

PROSHARP		PRODUCT INFO	
Model	PM-20A	Punching speed	2-3S
Type	Hydraulic Punching Machine	Punching range	6-20mm
Color	Silver gray	Punching thickness	0-6mm
Power	450W	Battery capacity	5000mA
Voltage	18V 5Ah	Material type	Steel plate, iron plate, copper plate, aluminum plate, etc.
Battery charging time	90min		
Battery charger input	AC110-240V 50-60Hz		
PRODUCT SIZE		PACKAGE SIZE	
Length(mm)	280	Length	500
Width(mm)	450	Width	155
Height(mm)	130	Height(mm)	430
Weight(kg)	14	Weight(kg)	21

Toolbox includes: Hydraulic oil can, tool kit, operating manual, battery (2), battery charger and side handle

Cold Cut Saw

- ✔ 10" & 14" DESKTOP COLD CUT SAW
- ✔ HIGH-POWER MOTOR, FAST CUTTING
- ✔ NO BURRS & DUST, NOT CHANGE COLOR
- ✔ ALSO HAVE MODELS FOR THREAD ROLLING MACHINE



BS-355D 14" Desktop Cold Cut Saw

Cold cut saw



■ Product Features

- High-power 3500W motor
- Fast cutting speed
- No burrs, no changing color, no dust
- Smoother mechanical rotation & cutting

PROSHARP	PRODUCT INFO		
Model	BS-355D	Number of saw blade teeth	66T
Rated voltage	Single phase AC 220V 50HZ	Net weight	25KG
Rated power	3500W	Gross weight	27KG
Saw blade diameter	355mm	Shell color	Red, Orange, Gray
Saw-tooth thickness	2.2mm	Carton ruler(inch)	61*38.5*49.5cm

BS-255D 10" Desktop Cold Cut Saw

Cold cut saw



■ Product Features

- High-power 3000W motor
- Fast cutting speed
- No burrs, no changing color, no dust
- Smoother mechanical rotation & cutting

PROSHARP		PRODUCT INFO	
Model	BS-255D	Number of saw blade teeth	48T
Rated voltage	Single phase AC 220V 50HZ	Net weight	23KG
Rated power	3000W	Gross weight	25KG
Saw blade diameter	255mm	Shell color	Red, Orange, Gray
Saw-tooth thickness	2.0mm	Carton ruler(inch)	59.5*38.5*44.5cm

BS-355 14" Cold Cut Saw for Thread Rolling Machine

Cold cut saw




■ Product Features

- Special for thread rolling machine
- High-power 3500W motor
- Fast cutting speed
- No burrs, no changing color, no dust
- Smoother mechanical rotation & cutting

PROSHARP		PRODUCT INFO	
Model	BS-355	Number of saw blade teeth	66T
Rated voltage	Single phase AC 220V 50HZ	Net weight	22KG
Rated power	3500W	Gross weight	24KG
Saw blade diameter	355mm	Shell color	Red, Orange, Gray
Saw-tooth thickness	2.2mm	Carton ruler(inch)	61*38.5*49cm

BS-255 10" Cold Cut Saw for Thread Rolling Machine

Cold cut saw

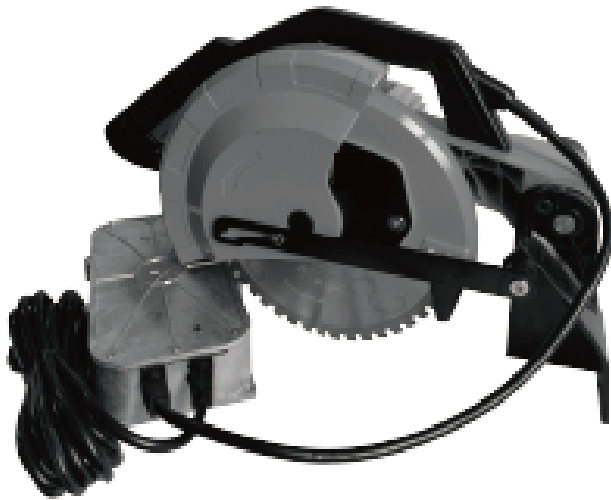

■ Product Features

- Special for thread rolling machine
- High-power 3000W motor
- Fast cutting speed
- No burrs, no changing color, no dust
- Smoother mechanical rotation & cutting

PROSHARP	PRODUCT INFO		
Model	BS-255	Number of saw blade teeth	48T
Rated voltage	Single phase AC 220V 50HZ	Net weight	20KG
Rated power	3000W	Gross weight	22KG
Saw blade diameter	255mm	Shell color	Red, Orange, Gray
Saw-tooth thickness	2.0mm	Carton ruler(inch)	59.5*38.5*44.5cm



ABOUT PROSHARP



Focuses on Portable Electric Hydraulic Tools' Manufacturing & Sales

PROSHARP TOOL is a scientific and technological enterprise that specializes in R&D, production and sales of portable rebar cutter, rebar bender, rebar straightening machine, hydraulic punching machine and other products. PROSHARP products have been widely used in construction engineering, electric power industry, fire fighting and the other industries.

PROSHARP TOOL has focused on hydraulic technology research and development for 12 years. PROSHARP has established a completed quality assurance management system and passed ISO9001: 2000 international management system certification. PROSHARP products have passed CE certification and ROHS certification. Exported to more than 20 countries and regions, and have established close partnerships with distributors and OEM customers.



PROSHARP TOOL has technical patents for the design process of hydraulic cylinders and pump bodies, key parts and seals are made of German and Japanese well brand products. PROSHARP plant area is 16,000 square meters, has more than 120 sets of high-precision production and processing equipment, annual production capacity of 100,000 units/sets, advanced production technology and complete technical testing to ensure that PROSHARP products can achieve long service life, high precision, high speed, heavy duty, energy saving and other characteristics.





ABOUT PROSHARP



★ Superior Product Performance

We have advanced production technology & completed multi test to ensure that PROSHARP products can achieve long life, high precision, high speed, heavy duty, energy saving ...

★ Technical Patents & Imported Key Components

We have technical patents for the design process of hydraulic cylinders and pump bodies, key parts and seals are made of German and Japanese well brand products.

★ Completed Quality System

We have established a completed quality assurance management system and passed ISO9001: 2000, CE & ROHS certification.




PROSHARP TOOL has committed to the research and development of advanced hydraulic drive technology, and providing fast, efficient, safe and reliable rebar processing equipment and special customized solutions for construction machinery. More than 100 employees work hard to continuously improve products and services to ensure reliability and maintainability. Paying attention to the satisfaction of customers and employees is an important theme in PROSHARP.



Always provide fast technical support and spare parts service within 24 hours, PROSHARP is very grateful for your business and feedback from all over the world. PROSHARP always goes hand in hand with our partners.



CERTIFICATES

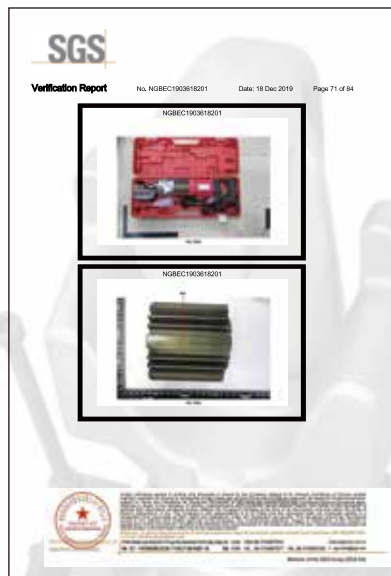



Our commitment:

Management is implemented in strict accordance with ISO9001 Quality Management System and ISO14001 Environmental Management System.
All products have passed rigorous factory test to ensure high quality before ship.
Product warranty terms are strictly enforced.
Professional, timely, thoughtful and dedicated services are offered.
Favorable and complete original accessories are supplied.
24/7/365 Customer Service Center provides fast and effective responses to customers' service .

Technical Services Include:

Service maintenance and technical support of customers.
Tool repair guidance and technical support.
Technical consultations and training online.

Product warranty regulations:

Warranty period:

The company only provides free repairs to failures caused by quality problems. Under normal using condition, the product warranty period is within three months from the date of purchase.

The following situations occur during the warranty period, which are not covered by the warranty:

- (1) Anything that does not have a valid legal document (invoice) to prove the date of purchase.
- (2) Wearable parts such as seal ring, carbon brush, blade, etc. are not covered by the warranty.
- (3) Any stator and rotor burnout damage caused by natural wear, rotor commutator diameter wear greater than or equal to 0.2mm, or overload work.
- (4) Any damage caused by using of low-cost & inferior accessories, or improper carrying, transportation & storage.
- (5) Any damage caused by misuse, beyond the scope of use of the tool, and not used and maintained in accordance with the instructions.

Note: The company reserves the right to modify the above regulations and has the final right to interpret the warranty service without violating national laws and regulations.





The company has passed
ISO9001:2000

- Portable Rebar Cutter
- Portable Rebar Bender
- Rebar Straightening Machine
- Hydraulic Punching Machine
- Cold Cut Saw

Always provide fast technical support and spare parts service within 24 hours, PROSHARP is very grateful for your business and feedback from all over the world. PROSHARP always goes hand in hand with our partners.

PROSHARP TOOL

Wen Zhou Opticar Lighting Co., Ltd.

Tel: +86-577-63786911 Mobile:+86 13915033441

WhatsApp: +86 139 1503 3441

Email: info@prosharptool.com

Add.: No.18-6, Mingshan Road, Kunyang Town,
Pingyang County, Wenzhou City, Zhejiang Province, China

Website: www.prosharptool.com